

TA IQ FWD-MWD-RWD

2.518



Allowed user weight

140 kg Allowed user weight



MySeat with comfort and flexibility

CHARACTERISTICS

- New seat adjustment module (tilt module) ensures greater stability and comfort for the user
- Biomechanical solutions for the backrest, armrests and leg rests with the MYSeat system
- The new design improves product quality and reliability, as well as service times for specialist retailers
- The best of the MEYRA Group in a single product:
 - TA iQ Powerbase
 - MYSeat System
 - NETTI Seating & Positioning
 - VARILITE Seating & Positioning

FIELD OF USE

- Extremely small turning circle for effortless manoeuvring in the tightest of spaces
- Outstanding agility indoors and outdoors for maximum flexibility in everyday life
- Six wheels ensure constant contact with the ground for excellent stability and a smooth ride
- Impressive off-road capability for greater independence across a range of terrain conditions

THERAPEUTIC BENEFIT

- Improving functional independence in everyday life and expanding the range of movement to enable independent use of shelves, work surfaces and control panels
- Promoting social interaction on an equal footing to improve communication and participation
- Improving the ability to carry out activities of daily living (ADL) independently, and thereby social participation
- TA iQ is suitable for
 - Muscular dystrophy
 - Multiple sclerosis (MS)
 - Cerebral palsy
 - Spinal cord injuries
 - Amyotrophic lateral sclerosis (ALS)
 - Traumatic brain injuries
 - Parkinson's disease
 - Severe rheumatoid arthritis

● ORDER

○ COST ESTIMATE

○ CUSTOM DESIGN

Please send the order form by e-mail to: info@meyragroup.com

Customer service: +49 571 93292 555

Billing address / Customer ref. no.:

Delivery address:

Tax-ID

Consignment / Comments:

Order quantity:

MEYRA



Allowed user weight

140 kg Allowed user weight



Hints

Our Terms and Conditions as stated at www.meyra.de/AGB shall apply

You can find information on the measurement process at www.meyra.de/messverfahren

Valid from 01.01.2026 – 31.12.2026

Errors, misprints and changes reserved.

Use our K.I.S.S.S. for orders and configurations at www.kisss-by-meyra.de

You avoid queries and incorrect orders thanks to the buildability check

USER DATA

First name

Name

Street

ZIP CODE

City

Country

Birthday

Diagnosis 1

Diagnosis 2

Tel.

Mobil

E-mail

Order number

Health insurance fund / cost unit

Specialist trade Contact person/phone.

Supply specialist MEYRA

Approval info from week

ANATOMICAL DATA (IN MM)

1) Seat depth

2) Seat width

3) Chest width

4) Chest depth

5) Elbow height

6) Armpit height

7) Back height


8) Head height

9) Forearm length

10) LLL

Body height

Weight (kg)

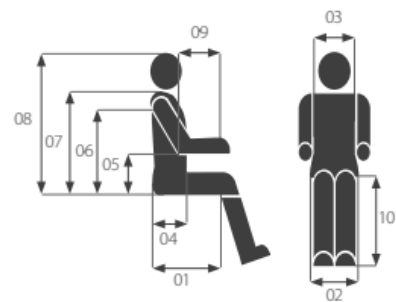

Remarks

☐ I accept the Terms and Conditions of Meyra Distribution GmbH (valid as of January 2023)

<https://www.meyra.com/gtc/>

Date

City

Signature

**Technical specifications**

Overall length (measured at 0° seat angle) in mm	1190 - 1350
Total width in mm	600 - 770
Overall height in mm	910 - 1180
Permissible user weight in kg	140
Permitted total weight in kg	320
Transport empty weight in kg	100 kg without battery / 160 kg with 80Ah battery
Motor power	2 x 350 Watt
Speeds in km/h	6 / 10 / 12
Range in km	35 - 40
Obstacle height in mm	max. 80
Permitted inclination/slopes	10° (18 %)
Electrically adjustable backrest angle	80° - 140° / 90° - 150° / 90° - 170° (Code 25 / Code 2947 / Code 2948)
Mechanical backrest angle	80° - 120° (Code 401)
Seat stroke in mm	300
Seat camber electric	0° - 45°
Minimum turning radius in mm	700
Ground clearance in mm	60 (12,5" drive wheel), 70 (14" drive wheel)

☐ Please select by ticking the relevant boxes☒ Special construction/individual solution o.r. - on request☐ Standard version: If no other selection is made, the standard version will be delivered.**01 Chassis / engine / frame options****Chassis**

CODE	DESCRIPTION	Drive type
☐ 2528	IQ MWD	Mid-wheel drive

Engine

CODE	DESCRIPTION	RANGE	MOTOR POWER	MAX. USER WEIGHT
☐ 2115	6 km/h	max. 40 km	2 x 350W 4-POL	140 kg
☐ 2117	10 km/h	max. 35 km	2 x 350W 4-POL	140 kg
☐ 2120	12 km/h	max. 35 km	2 x 350W 4-POL	140 kg

⚠ ATTENTION:
For 10 km/h and 12 km/h motorised versions:
in Germany, only in conjunction with TÜV certificate CODE 4772
plus rear marking film CODE 2676
or rear marking plate CODE 676

☐ Please select by ticking the relevant boxes☒ Special construction/individual solution o.r. - on request☐ Standard version: If no other selection is made, the standard version will be delivered.**02 Wheels and tyres****Drive wheels**

		FSH (mm)			
		(C-2511)	(C-2512)	(C-2511)	(C-2512)
Code	Ø Rim	385	405	395	415
815	12"	☐	☐		
460	14"			☐	☐

⚠ 12" drive wheel CODE 815 not compatible with Dahl docking station adapter set CODE 2721
VSH 385 mm / 395 mm CODE 2511 compatible only with:
armrest CODE 24
central leg support CODE 5100
central footplate CODE 5109

Drive wheels Tyres

CODE	DESCRIPTION	Tyres
☐ 482	Tread pattern	Pneumatic tyres
☐ 905	Tread pattern	Puncture-proof tyres

Steering wheels / Tyres

		Tyres	
		(C-146)	(C-900)
Code	Ø Lightwheel	Pneumatic tyres	Puncture-proof tyres
157	8" 200 x 50 mm	☐	☐
163	8,5" 220 x 65 mm	☐	☐

⚠ 8,5" steering wheel CODE 163 not compatible with 12' drive wheel CODE 815

☐ Please select by ticking the relevant boxes☒ Special construction/individual solution o.r. - on request☐ Standard version: If no other selection is made, the standard version will be delivered.**Rim colour**

CODE	DESCRIPTION
☐ 200	Black
☐ 201	Silver-black  Not compatible with 8.5" steering wheel CODE 163 Not compatible with 12" drive wheel CODE 815

Tyre colour

CODE	DESCRIPTION
☐ 909	Grey
☐ 908	Black  Not compatible with 12" drive wheel CODE 815

Mud guard

CODE	DESCRIPTION
☐ 816	Mud guard for Castor wheels  Not compatible with 8.5" steering wheel CODE 163

☐ Please select by ticking the relevant boxes☒ S Special construction/individual solution o.r. - on request☐ Standard version: If no other selection is made, the standard version will be delivered.**03 Seat****Seat width/depth**

		Seat depth (mm)					
		(C-615)	(C-788)	(C-619)	(C-4105)	(C-791)	(C-955)
Code	Seat width	400	430	460	490	520	550
38	380 mm	☐	☐	☐	☐	☐	☐
43	430 mm	☐	☐	☒	☐	☐	☐
48	480 mm	☐	☐	☐	☐	☐	☐
53	530 mm	☐	☐	☐	☐	☐	☐

⚠ Seat depth 550 mm CODE 955 not compatible with electric seat tilt CODE 4118

Seat Cushions

CODE	DESCRIPTION
☐	without seat cushion
☐ 948	iCHAIR MEYLIFE contour seat cushion
☐ 7206	Netti Uno
☐ 7203	Netti Sit cushion

⚠ NETTI cushion (not included) with a seat depth of 550 mm CODE 955

Cover for MYSeat contour cushion

CODE	DESCRIPTION
☐ 237	Textile cover black
☐ 254	Synthetic leather

⚠ is only used on contour cushions 948/949

☐ Please select by ticking the relevant boxes☒ Special construction/individual solution o.r. - on request☐ Standard version: If no other selection is made, the standard version will be delivered.**Seat tilt / seat lift**

CODE	DESCRIPTION
☐ 4118	Electric tilt, adjustable from 0° to 45°
☐ 27	Seat lift 300 mm

 Both options are included in the basic model**04 Back systems****Round tube back, back cushion and height**

Code	Description	Back height (mm)	
		(C-921)	(C-922)
		520	570
608	Round tubes, 22 mm, prepared for external backrest systems	☐	☐
608/735	Strap back without polster	☐	☐
608/736	Strap back with polster, black	☐	☐
608/7201	Netti Uno Back, 3D, breathable	☐	☐
608/7209	Netti Smart, 3D, breathable	☐	☐
608/7207	Netti Stabil, 3D, breathable	☐	☐
608/7210	Netti Super Stabil, 3D, breathable	☐	☐
608/7205	Netti Kyphotic, 3D, breathable	☐	☐

Back adjustments for round tube backs

CODE	DESCRIPTION
☐ 401	Mechanical back recline for round tube backs
☐ 25	Electric back recline for round tube backs

☐ Please select by ticking the relevant boxes☒ Special construction/individual solution o.r. - on request☐ Standard version: If no other selection is made, the standard version will be delivered.**Central back/contour back**

Code	Description	Back height (mm)			
		(C-921)	(C-922)	(C-923)	(C-928)
		520	570	620	670
949/2038/2859	Contour back 380mm wide	☐	☐	☐	☐
949/2043/2859	Contour back 430mm wide	☐	☐	☐	☐
949/2048/2859	Contour back 480mm wide	☐	☐	☐	☐
949/2053/2859	Contour back 530mm wide	☐	☐	☐	☐

⚠ CODE 921 and CODE 922 not compatible with electric biomechanical backrest adjustment for central backrest CODE 2948
CODE 928 not compatible with electric backrest adjustment for central backrest CODE 2947

Back adjustments for central back

CODE	DESCRIPTION	Degree angle	
☐ 2946/2947	Electric backrest recline for central back ⚠ Not compatible with biomechanical armrest CODE 324	150°	infinitely variable
☐ 2946/2948	Electric biomechanical back adjustment for central back ⚠ Only in conjunction with armrest swivel-up, angle-adjustable, biomechanical CODE 324	170°	infinitely variable

☐ Please select by ticking the relevant boxes☒ Special construction/individual solution o.r. - on request☐ Standard version: If no other selection is made, the standard version will be delivered.**Additional options/positioning**

CODE	DESCRIPTION	POSITIONING
☐ 241	Multifunctional headrest with an easy-care cover	
☐ 242	Multifunctional headrest with 3D mesh cover	
☐ 937	Headrest extension	
☐ 4275	Mounting rails, accessories on the back  Not compatible with round tube backrest CODE 608	Contour
☐ 2957	Swing-away chest laterals  Only in conjunction with mounting rails CODE 4275	Contour
☐ 797	Side bolster for seat cushion (Seat Cushion side support)	Seat pan
☐ 4933	Thigh Guides continuously adjustable in width and length	Seat pan
☐ 814	Push handle continuous for central back  Not compatible with round tube backrest CODE 608	Contour
☐ 2958	Depth extension for round tube backs	Round tube
☐ 2311	Back tubes outriggered 25 mm per side for round tube back Code 608	Round tube
☐ 2313	Back tubes Inrigged 25 mm per side for round tube back Code 608	Round tube

05 Armrests

1 = removable 2 = height-adjustable 3 = width-adjustable 4 = depth-adjustable 5 = height-adjustable 6 = biomechanical

CODE	DESCRIPTION	FUNCTIONS
☐ 106	Single post Armrest removable, height and depth adjustable  Not in combination with the electric biomechanical backrest adjustment CODE 2948 Not in combination with seat height A CODE 2511	1,2,3,4
☐ 24	Armrest Flip up, angle-adjustable  Not i.c. with elect. biomechanical backrest adjustment CODE 2948	2,3,4,5
☐ 324	Armrest Flip up, angle-adjustable, biomechanical  Not compatible with electric backrest adjustment CODE 2947	2,3,4,5,6

Armrests options

CODE	DESCRIPTION
☐ 101	Clothing guard for armrest  Only i.c. with standard armrest CODE 106
☐ 4422	Armrest fixation in initial position  Only in combination with biomechanical armrest CODE 324 or swivelling armrest CODE 24

☐ Please select by ticking the relevant boxes☒ Special construction/individual solution o.r. - on request☐ Standard version: If no other selection is made, the standard version will be delivered.**Armrest cushion LEFT**

CODE	DESCRIPTION	POSITION
☐ 975	Armrest padded (standard)	left
☐ 4990	Armrest padded (standard) with swivel joint	left
☐ 4982	Armrest hemiplegia lower arm support	left
☐ 4993	Armrest hemiplegia lower arm support with swivel joint	left

Right armrest cushion

CODE	DESCRIPTION	POSITION
☐ 974	Armrest padded (standard)	right
☐ 4984	Armrest padded (standard) with swivel joint	right
☐ 4981	Armrest hemiplegia lower arm support	right
☐ 4991	Armrest hemiplegia lower arm support with swivel joint	right

Hand rests for hemiplegia forearm shell LEFT

CODE	DESCRIPTION	POSITION
☐ 4988	Handrest flat for hemiplegia lower arm support	left
☐ 4987	Handrest with ergonomic grip for hemiplegia lower arm support	left

 Not compatible with armrest padded on the left CODE 975
Not compatible with armrest padded with swivel joint on the left CODE 4990

Hand rests for hemiplegia forearm shell RIGHT

CODE	DESCRIPTION	POSITION
☐ 4985	Handrest flat for hemiplegia lower arm support	right
☐ 4986	Handrest with ergonomic grip for hemiplegia lower arm support	right

 Not compatible with armrest padded on the right CODE 974
Not compatible with armrest padded with swivel joint on the right CODE 4984

☐ Please select by ticking the relevant boxes☒ Special construction/individual solution o.r. - on request☐ Standard version: If no other selection is made, the standard version will be delivered.**Extension for hemiplegia lower arm support**

CODE	DESCRIPTION	POSITION
☐ 4989	Extension for hemiplegia forearm shell LEFT  Not compatible with armrest padded on the left CODE 975 Not compatible with armrest padded with swivel joint on the left CODE 4990	left
☐ 4983	Extension for hemiplegia forearm shell RIGHT  Not compatible with armrest padded on the right CODE 974 Not compatible with armrest padded with swivel joint on the right CODE 4984	right

06 Leg supports**Side leg rests**

CODE	DESCRIPTION
☐ 293	80° Legrests, detachable and swing-away
☐ 4092	Elevating leg rests (Manual), removable, Tool height-adjustable
☐ 2086	Powered elevating, Legrests, removable,

Options for side leg supports

CODE	DESCRIPTION	depth	LLL
☐ 808	Flip up footrests, angle adjustable		
☐ 57	One-piece footrest		

Central legrest

CODE	DESCRIPTION	LS-ANGLE	LLL
☐ 5092/5100	Central legrest, mechanically angle adjustable  Only in conjunction with the footplate option for the central leg support, CODE 5109	85°-95°	280-400 mm
☐ 4935/5086	Electric central leg support (including calf pads, CODE 2945), electric length adjustment  Only in conjunction with the footplate option for the central leg support, CODE 5109	90°-170°	200-400mm
☐ 4949/5086	Powered central legrest (incl. calf pad), electrically lowerable, length adjustment floor  Only in conjunction with the footplate option for the central leg support, CODE 5109	90°-170°	350-450mm

☐ Please select by ticking the relevant boxes☒ Special construction/individual solution o.r. - on request☐ Standard version: If no other selection is made, the standard version will be delivered.**Footplate options for central legrest**

CODE	DESCRIPTION
☐ 5109	Standard foot plate for central legrest

 Not compatible with lateral legrests**Additional options Leg support**

CODE	DESCRIPTION
☐ 822	Toe strap (pair)
☐ 823	Heel Loops (pair)
☐ 2945	Calf pads for central leg support

07 Batteries/Chargers/Lighting**Batteries**

CODE	DESCRIPTION
☐ 5158	Batteries: 66 Ah (5H), 80 Ah (20H), maintenance-free
☐ 700	Without batteries

Battery chargers

CODE	DESCRIPTION
☐ 732	Charger 8 A for 73 Ah (5H)
☐ 733	Charger 12 A for 73 Ah(20h)
☐ 701	Without charger

Lighting

CODE	DESCRIPTION
☐ 932	Active LED-lighting front and rear acc. to StVZO
☐ 703	Without active LED lighting

☐ Please select by ticking the relevant boxes☒ Special construction/individual solution o.r. - on request☐ Standard version: If no other selection is made, the standard version will be delivered.**08 Control modules/mounting/brackets/adjustment modules****R-NET control system**

120A power module, ISM8 adjustment module

Code	Control modules	
702/415	R-NET LED	☐
702/416	R-NET LCD	☐
702/398	R-NET LCD IR/BT	☐
702/839/2859	R-NET OMNI II	☐

 R-NET OMNI II is currently unavailable**Vehicle stability control module**

CODE	DESCRIPTION
☐ 918	Gyro module, vehicle stabilisation module
	 Not compatible with the LED Code 415 control module

Joystick Location

CODE	DESCRIPTION
☐ 74	Assembly right
☐ 60	Assembly left

Joystick /Control module holder

CODE	DESCRIPTION
☐ 4859	Joystick bracket, length adjustable
☐ 4860	Operating module holder, length and height adjustable, swingaway
☐ 2074/4789	Attendant control mounted on the right, including 4-way bus distributor CODE 2859
☐ 2060/4789	Attendant control mounted on the left, including 4-way bus distributor CODE 2859

☐ Please select by ticking the relevant boxes☒ Special construction/individual solution o.r. - on request☐ Standard version: If no other selection is made, the standard version will be delivered.

External adjustment module

CODE	DESCRIPTION	ASSEMBLY
☐ 4446/4597	External control panel TA, for 5 electrical functions  Only in conjunction with control module bracket CODE 4860 Not for use in conjunction with control module CODE 415	Control module side
☐ 4446/4599	External control panel TA, for 5 electrical functions  Not compatible with control module CODE 415	opposite the control module side

R-NET special control system

CODE	DESCRIPTION
☐ 4660	Table top control can be swivelled to the right  Not compatible with armrest CODE 24 Not compatible with R-Net OMNI II CODE 839
☐ 4661	Table top control can be swivelled to the left  Not compatible with armrest CODE 24 Not compatible with R-Net OMNI II CODE 839

Eye-Controlled driving system

Item	DESCRIPTION
☐ 1096410	Seat-installation system  Mandatory selection if GazeDriver is selected
☐ 1096412	GazeDriver Set R-Net
☐ 1096413	Therapy table - installation system

Operating module software

CODE	DESCRIPTION
☐ 985	Series programming (standard)
☐ 998	Special programming (deviation from standard)

☐ Please select by ticking the relevant boxes

S

 Special construction/individual solution o.r. - on request

☐ Standard version: If no other selection is made, the standard version will be delivered.

External button

for users who can hardly operate the keys of the operating module or as an emergency/off function for accompanying person

CODE	DESCRIPTION
☐ 596	Push-button, diameter 63 mm, yellow
☐ 778	Push-button, diameter 30 mm, green
☐ 779	Push-button, diameter 30 mm, yellow

Joystick attachments

CODE	DESCRIPTION	CONTROL
☐ 553	TETRA fork vertical	R-NET
☐ 4590	Joystick button ball handle 38 mm	R-NET
☐ 4591	Joystick button T-handle	R-NET
☐ 4593	Joystick button handle	R-NET
☐ 4594	Joystick button handle	R-NET
☐ 4595	Joystick knob softball 70 mm	R-NET
☐ 4596	Golfball, small, 43 mm	R-NET

09

Accent colours

CODE	FRAME	AKZENTE
☐ 186	Matt black	Magic Blue
☐ 212	Matt black	Polar white
☐ 227	Matt black	Red metallic
☐ 180	Matt black	Lemon reflex
☐ 214	Matt black	Sun yellow

☐ Please select by ticking the relevant boxes☒ Special construction/individual solution o.r. - on request☐ Standard version: If no other selection is made, the standard version will be delivered.

10 Options around the wheelchair

CODE	DESCRIPTION
☐ 4646	Therapy table swivelling sideways
☐ 589	Shoulder Harness
☐ 833	Safety belt (metal buckle)
☐ 2859	Bus distributor 4-fold

11 Service

Item	DESCRIPTION
☐ 55704	Flat fee for customised parameterisation (not eligible for discounts)  The on-the-spot service covers only simple adjustment of parameter sets, such as acceleration, speed etc.
☐ 55709	Medically necessary parameterization to client-specific setting values  The on-the-spot service covers simple program adjustments as well as the integration of special controls.